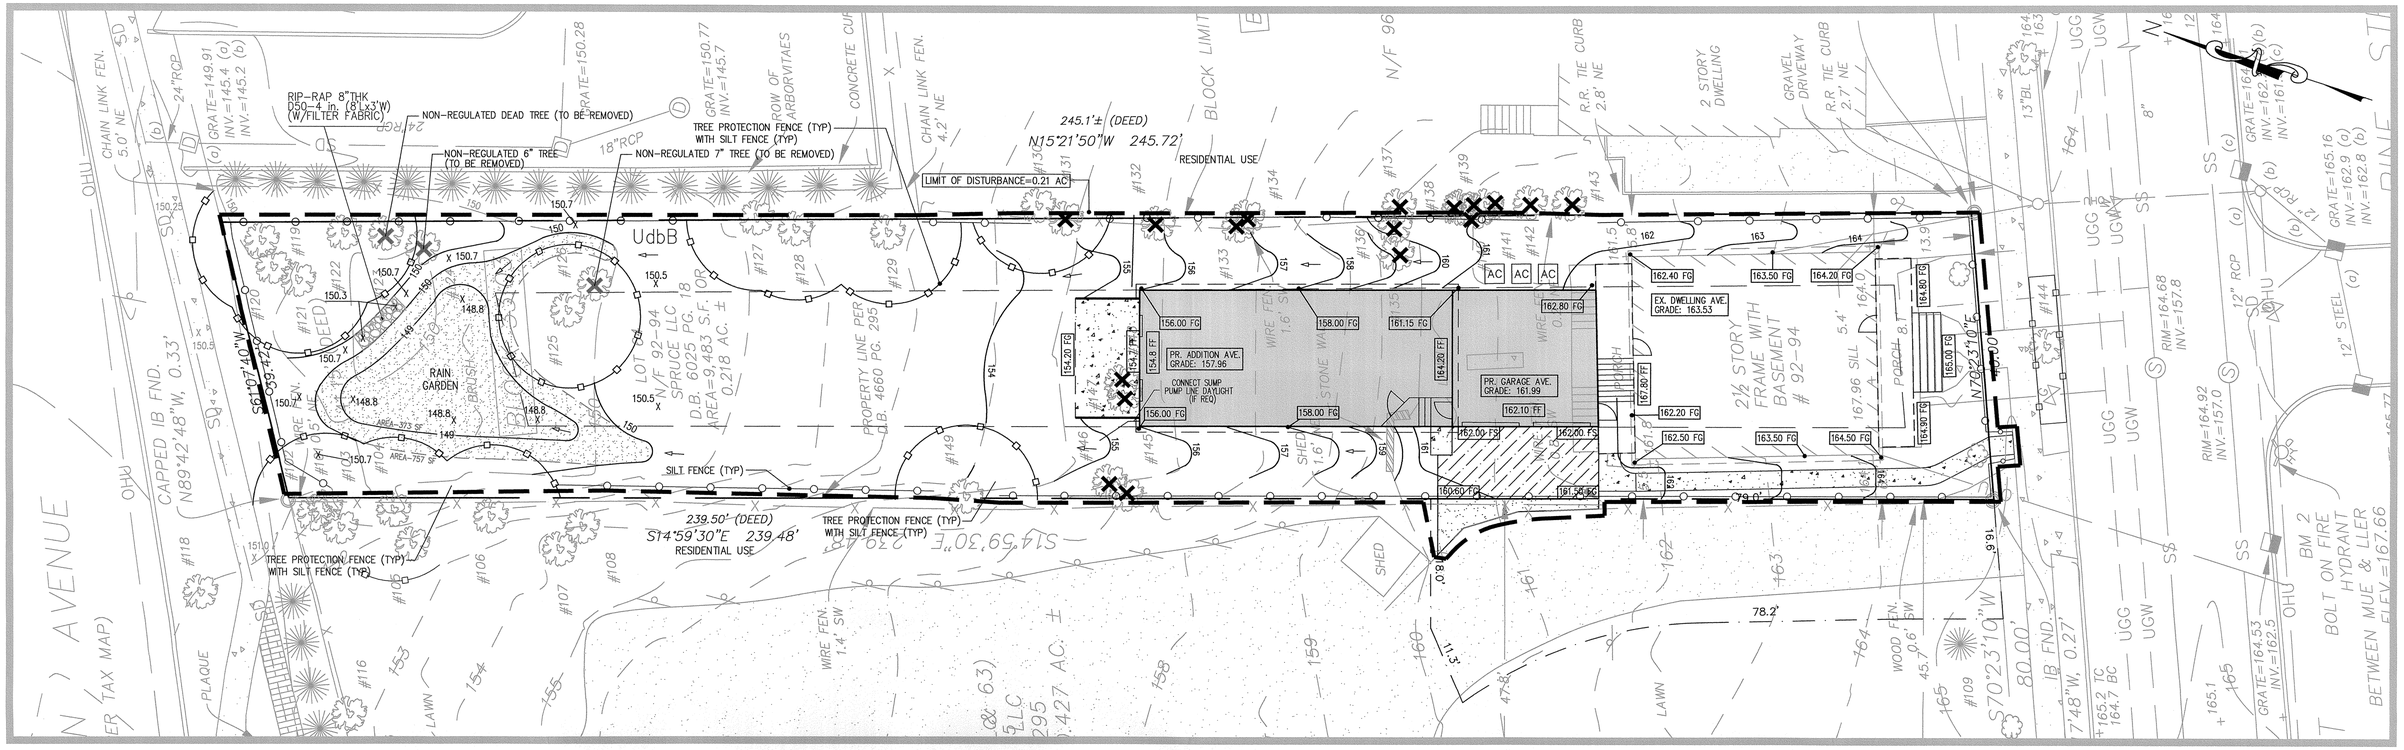


SESC NOTES:

1. SOIL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IMPLEMENTED IN ACCORDANCE WITH THE NEW JERSEY STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL AND THE SOIL CONSERVATION DISTRICT. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE SOIL CONSERVATON DISTRICT PRIOR TO ANY SITE DISTURBANCE.

2. REFER TO DETAIL SHEET FOR SESC DETAILS, NOTES AND SPECIFICATIONS.

3. SOIL EROSION AND SEDIMENT CONTROL MEASURES SHALL THAT APPLY TO THE DWELLING CONSTRUCTION SHALL BE MAINTAINED ON THE PROPERTY BY THE CURRENT OWNER AND ALL SUBSEQUENT OWNERS IF TITLE IS CONVEYED.

4. THE MAINTENANCE OF PERMANENT SOIL EROSION AND SEDIMENT CONTROL MEASURES ON THE PROPERTY IS THE RESPONSIBILITY OF THE PROPERTY OWNER AND SHALL BE MAINTAINED BY THE PROPERTY OWNER.

GRADING & SESC PLAN

RAIN GARDEN PLANT LIST

SYMBOL	QTY.	BOTANICAL NAME	COMMON NAME	PLANTED HT.	CALIPER	REMARKS
CS	10	CORNUS SERCEA	RED OSIER DOGWOOD	18"–24"	–	#3 CONT.
SC	2	SAMBUCUS CADADENSIS	AMERICAN ELDERBERRY	24"–30"	–	#5 CONT.

RAIN GARDEN VOLUME CALCULATION

STORAGE PROVIDED:

RAIN GARDEN HAS BEEN SIZED TO STORE 480 CF OF STORAGE (FOR UP TO 1,800 SF OF NEW IMPERIOUS AT 2 GPD/SF). LOCATION AND EXTENT FOLLOW EXISTING TOPOGRAPHIC CONDITIONS.


VOLUME OF RAIN GARDEN (VOLUME BELOW ELEV. 150.0) :

CONTOUR 150 – 757 SF (EXCL. ELEV < EL. 149)
CONTOUR 149 – 373 SF

TOTAL VOLUME – 565 CF > 480 CF MIN. REQUIRED (O.K.)

SOILS INFORMATION (PER USDA SOIL SURVEY)

UdbB – UDORTHENTS (0–8% SLOPES)

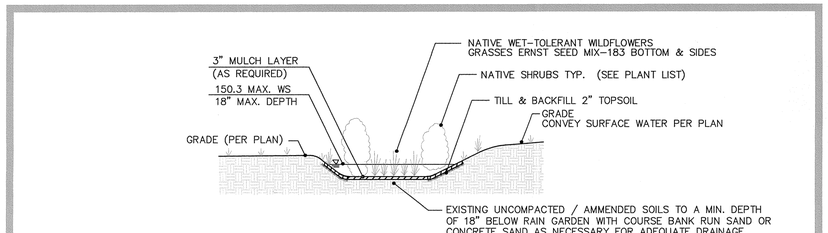

SECTION – RAIN GARDEN


RAIN GARDEN DETAIL

NOT TO SCALE

OVERFLOW SPILLWAY LOCATION/ELEVATION PER PLAN

UNDERDRAIN SYSTEM MAY BE INSTALLED BELOW RAIN GARDEN IF REQUIRED FOR DRAINAGE AND IF APPROVED BY THE MUNICIPALITY.

NOTE THAT THIS BMP IS A SUPPLEMENT TO THE EXISTING TOPOGRAPHIC FEATURES AND DRAINAGE CONDITIONS.

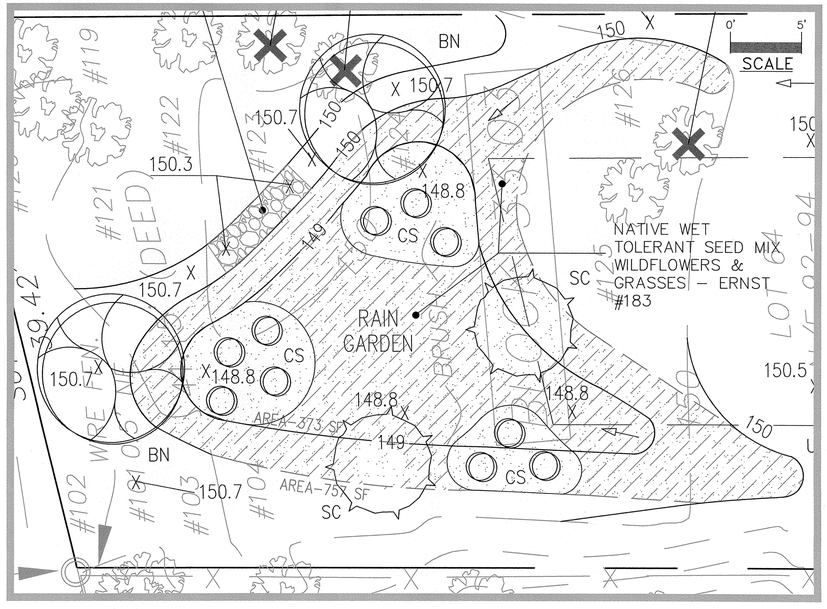

RAIN GARDEN – MAINTENANCE TASKS

1. THE OWNER SHALL INSPECT THE RAIN GARDEN QUARTERLY. ANY ACCUMULATED DEBRIS SHALL BE REMOVED.

2. NATIVE GRASSES AND WILDFLOWERS WITHIN RAIN GARDEN SHALL BE CUT ONCE ANNUALLY. ALL DEBRIS AND VEGETATION CLIPPINGS SHALL BE REMOVED FROM RAIN GARDEN AS PART OF THIS MAINTENANCE TASK. OTHER PLANTINGS TO BE MAINTAINED.

LEGEND

100	EXISTING CONTOUR
100	PROPOSED CONTOUR
FG 100.0x	SPOT ELEVATION (EXIST)
FG 100.0	SPOT ELEVATION (PROP)
	LIMIT OF DISTURBANCE
	SILT FENCE
	TREE PROTECTION FENCE

CONSTRUCTION DRAWINGS APPROVED

DATE Jan. 16, 2019

for Engrg. Dept.

REVISIONS

No.	DESCRIPTION	BY	DATE
1	ADDED RAIN GARDEN PER MUNI.	JJC	11/28/18
2	REV. RAIN GARDEN DETAIL PER MUNI.	JJC	12/20/18
3	REV. PER LAND USE ENG'R COMMENT	JJC	1/10/19

KENSHO RESOURCES LLC
360 NASSAU STREET, SECOND FLOOR
PRINCETON, NEW JERSEY 08540
PH. (609) 924–1091
FAX. (609) 924–1092
JIM@KENSHORESOURCES.COM

1/10/19
JAMES J. CHMIELAK, JR. PE, PP DATE
PROFESSIONAL ENGINEER & PLANNER
N.J. P.E. NO. 24GE044793 N.J. P.P. 05892

PROJECT:

92-94 SPRUCE STREET

BLOCK 30.03 LOT 64 SHEET 140
PRINCETON
MERCER COUNTY, NEW JERSEY

SHEET TITLE:

GRADING & SESC PLAN

DESIGNED BY	MF	SHEET NO.
CHECKED BY	JC	1B
SCALE	AS NOTED	
FILENAME	GRADING.DWG	
JOB NO.	18018	
DATE	10/25/18	